


SOLDER TERMINALS - MOULDED DAP, TWIN TURRET

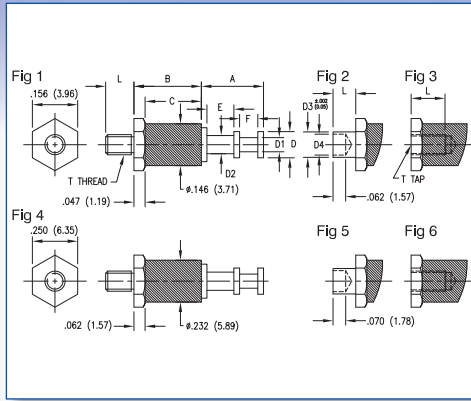

Dimensions in inches (mm)
See page 94 for recommended Anvil and Punch

How to order code

572 - 4XXX - XX - XX - 16

Basic Part No. | Insulator Colour | Terminal Finish

Material Code Table			Finish Code Table				Insulation Colour Code Table	
Component	Material	RoHS	Dash No.	Terminal Finish	Mtg. Stud Finish	RoHS	Dash No.	Colour
Insulator	Diallyl	✓	-01	Silver	Cadmium	X	-16	Blue
Mounting Stud	Brass	✓	-05	Electro-Solder	Cadmium	X		
Terminal	Brass	✓	-21	Silver	Nickel	✓		

Fig.	Basic Part No.	L	Board Thickness	A	B	C	D	D1	D2	D3	D4	E	F	T	IR (RMS)
1	572-4882 -01	.125 (3.18)	-	.156 (3.96)	.234 (5.94)	.188 (4.78)	.072 (1.83)	.047 (1.19)	.047 (1.19)	-	-	.048 (1.22)	.048 (1.22)	2-56	3000
	572-4906 -01	.118 (3.00)	-	.156 (3.96)	.238 (6.04)	.191 (4.85)	.072 (1.83)	.047 (1.19)	.047 (1.19)	-	-	.048 (1.22)	.048 (1.22)	M2 x 0.4	3000
2	572-4883 -01	.094 (2.39)	.062 (1.57)	.156 (3.96)	.234 (5.94)	.188 (4.78)	.072 (1.83)	.047 (1.19)	.047 (1.19)	.078 (1.98)	.067 (1.70)	.048 (1.22)	.048 (1.22)	-	3000
	572-4886 -01	.094 (2.39)	.062 (1.57)	.156 (3.96)	.391 (9.93)	.344 (8.74)	.072 (1.83)	.047 (1.19)	.047 (1.19)	.078 (1.98)	.067 (1.70)	.048 (1.22)	.048 (1.22)	-	3000
	572-4907 -02	.125 (3.18)	.094 (2.39)	.156 (3.96)	.238 (6.04)	.191 (4.85)	.072 (1.83)	.047 (1.19)	.047 (1.19)	.078 (1.98)	.067 (1.70)	.048 (1.22)	.048 (1.22)	-	3000
3	572-4884 -01	.078 (1.98)	-	.156 (3.96)	.234 (5.94)	.188 (4.78)	.072 (1.83)	.047 (1.19)	.047 (1.19)	-	-	.048 (1.22)	.048 (1.22)	2-56	3000
	572-4887 -01	.117 (2.97)	-	.156 (3.96)	.391 (9.93)	.344 (8.74)	.072 (1.83)	.047 (1.19)	.047 (1.19)	-	-	.048 (1.22)	.048 (1.22)	2-56	3000
	572-4908 -01	.079 (2.00)	-	.156 (3.96)	.238 (6.04)	.191 (4.85)	.072 (1.83)	.047 (1.19)	.047 (1.19)	-	-	.048 (1.22)	.048 (1.22)	M2 x 0.4	3000
4	572-4810 -01	.219 (5.56)	-	.344 (8.74)	.375 (9.53)	.312 (7.92)	.140 (3.56)	.062 (1.57)	.078 (1.98)	-	-	.148 (3.76)	.094 (2.39)	4-40	6000
	572-4811 -01	.219 (5.56)	-	.344 (8.74)	.375 (9.53)	.312 (7.92)	.140 (3.56)	.062 (1.57)	.078 (1.98)	-	-	.148 (3.76)	.094 (2.39)	6-32	6000
	572-4812 -02	.250 (6.35)	-	.344 (8.74)	.375 (9.53)	.312 (7.92)	.140 (3.56)	.062 (1.57)	.078 (1.98)	-	-	.148 (3.76)	.094 (2.39)	4-40	6000
	572-4816 -01	.219 (5.56)	-	.344 (8.74)	.594 (15.09)	.531 (13.49)	.140 (3.56)	.062 (1.57)	.078 (1.98)	-	-	.148 (3.76)	.094 (2.39)	4-40	6000
	572-4822 -01	.219 (5.56)	-	.219 (5.56)	.375 (9.53)	.312 (7.92)	.093 (2.36)	.047 (1.19)	.047 (1.19)	-	-	.093 (2.36)	.063 (1.60)	4-40	6000
	572-4823 -01	.219 (5.56)	-	.219 (5.56)	.375 (9.53)	.312 (7.92)	.093 (2.36)	.047 (1.19)	.047 (1.19)	-	-	.093 (2.36)	.063 (1.60)	6-32	6000
5	572-4812 -03	.250 (6.35)	-	.344 (8.74)	.375 (9.53)	.312 (7.92)	.140 (3.56)	.062 (1.57)	.078 (1.98)	-	-	.148 (3.76)	.094 (2.39)	4-40	6000
	572-4812 -04	.375 (9.53)	.094 (2.39)	.344 (8.74)	.375 (9.53)	.312 (7.92)	.140 (3.56)	.062 (1.57)	.078 (1.98)	.098 (2.49)	.064 (1.63)	.148 (3.76)	.094 (2.39)	-	6000
	572-4813 -01	.094 (2.39)	.062 (1.57)	.344 (8.74)	.375 (9.53)	.312 (7.92)	.140 (3.56)	.062 (1.57)	.078 (1.98)	.141 (3.58)	.116 (2.95)	.148 (3.76)	.094 (2.39)	-	6000
	572-4813 -02	.125 (3.18)	.094 (2.39)	.344 (8.74)	.375 (9.53)	.312 (7.92)	.140 (3.56)	.062 (1.57)	.078 (1.98)	.141 (3.58)	.116 (2.95)	.148 (3.76)	.094 (2.39)	-	6000
	572-4813 -03	.156 (3.96)	.125 (3.18)	.344 (8.74)	.375 (9.53)	.312 (7.92)	.140 (3.56)	.062 (1.57)	.078 (1.98)	.141 (3.58)	.116 (2.95)	.148 (3.76)	.094 (2.39)	-	6000
	572-4813 -04	.234 (5.94)	.188 (4.78)	.344 (8.74)	.375 (9.53)	.312 (7.92)	.140 (3.56)	.062 (1.57)	.078 (1.98)	.141 (3.58)	.116 (2.95)	.148 (3.76)	.094 (2.39)	-	6000
	572-4825 -01	.094 (2.39)	.062 (1.57)	.219 (5.56)	.375 (9.53)	.312 (7.92)	.093 (2.36)	.047 (1.19)	.047 (1.19)	.141 (3.58)	.116 (2.95)	.093 (2.36)	.063 (1.60)	-	6000
	572-4825 -02	.125 (3.18)	.094 (2.39)	.219 (5.56)	.375 (9.53)	.312 (7.92)	.093 (2.36)	.047 (1.19)	.047 (1.19)	.141 (3.58)	.116 (2.95)	.093 (2.36)	.063 (1.60)	-	6000
6	572-4814 -01	.156 (3.96)	-	.344 (8.74)	.375 (9.53)	.312 (7.92)	.140 (3.56)	.062 (1.57)	.078 (1.98)	-	-	.148 (3.76)	.094 (2.39)	4-40	6000
	572-4815 -01	.156 (3.96)	-	.344 (8.74)	.375 (9.53)	.312 (7.92)	.140 (3.56)	.062 (1.57)	.078 (1.98)	-	-	.148 (3.76)	.094 (2.39)	6-32	6000
	572-4820 -01	.219 (5.56)	-	.344 (8.74)	.594 (15.09)	.531 (13.49)	.140 (3.56)	.062 (1.57)	.078 (1.98)	-	-	.148 (3.76)	.094 (2.39)	4-40	6000
	572-4821 -01	.219 (5.56)	-	.344 (8.74)	.594 (15.09)	.531 (13.49)	.140 (3.56)	.062 (1.57)	.078 (1.98)	-	-	.148 (3.76)	.094 (2.39)	6-32	6000
	572-4826 -01	.156 (3.96)	-	.219 (5.56)	.375 (9.53)	.312 (7.92)	.093 (2.36)	.047 (1.19)	.047 (1.19)	-	-	.093 (2.36)	.063 (1.60)	4-40	6000
	572-4827 -01	.156 (3.96)	-	.219 (5.56)	.375 (9.53)	.312 (7.92)	.093 (2.36)	.047 (1.19)	.047 (1.19)	-	-	.093 (2.36)	.063 (1.60)	6-32	6000
	572-4833 -01	.219 (5.56)	-	.219 (5.56)	.594 (15.09)	.531 (13.49)	.093 (2.36)	.047 (1.19)	.047 (1.19)	-	-	.093 (2.36)	.063 (1.60)	6-32	6000